

## Precautions for Safe Use

• To use the battery safely and properly, be sure to read the instruction manual before use.

### Danger

- For stationary batteries, ensure that the room is well ventilated so that the hydrogen concentration is 0.8% or less. Failure to do so may cause fire or explosion.
- Do not install the battery in a poorly-ventilated area where the hydrogen concentration becomes more than 0.8%, or near open flame. Doing so may cause fire or explosion.

### Caution

- The service temperature range of the battery is from -15 to 45°C. Using the battery outside this range may accelerate deterioration or cause the battery to freeze or overheat, resulting in damage or deformation.
- Do not use this battery where it is exposed to direct sunlight. Doing so may cause the parts of the battery to deteriorate.
- Do not expose the battery to water or seawater. Doing so may cause damage to the battery or fire, or cause the terminals or connecting plates to corrode.
- Do not use the battery near a heat source. Doing so may cause damage to the battery or cause the battery life to shorten.
- Do not use the battery in dusty areas. Doing so may cause a short-circuit.
- Charge the battery under the charging conditions recommended by Furukawa Battery. Failure to do so may result in insufficient charging, electrolyte leakage, temperature rise, explosion, deterioration in performance, or reduced service life.
- Install the battery horizontally with the terminals facing up and ensure that the battery is not tilted more than 90°. Failure to do so may cause electrolyte leakage.
- Ensure that the maximum discharge current is not exceeded for more than 1 minute for 3C (A) or for more than 5 seconds for 6C (A). Failure to do so may cause damage to the battery.
- Periodically inspect the battery. If the results deviate from the standards specified in the instruction manual, follow the steps in the instruction manual. Using the battery with such deviations may cause damage to the battery, or burnout.



ISO9001 Certified  
JQA-T118  
(THE FURUKAWA BATTERY CO., LTD.)



ISO14001 Certified  
JQA-EM0380  
(waki and Imaichi Plants)

\*Actual colors may differ slightly from those in the photo due to printing limitations.

• Contact Information

## THE FURUKAWA BATTERY CO., LTD.

Head Office:  
2-4-1 Hoshikawa, Hodogaya-ku Yokohama, Kanagawa Prefecture 240-0006 Japan  
<http://www.furukawadenchi.co.jp>

• Information contained in this catalogue is current as of August 2014 and may be subject to change without notice.

## Horizontal Unitized Multi-stage Valve-regulated Stationary Lead-acid Battery

# FMU-S Series



## Features

### 1. Space Savings

Compact size with high capacity

### 2. Long Expected Life

Expected life of 13 to 15 years [25°C, 0.1C (A) discharge] ※Expected life is not a guaranteed values.

### 3. Easy Maintenance

All the cell terminals are in an easy-to-reach location, facilitating maintenance work such as voltage measurement.

### 4. Improved Seismic Performance

Because of its unitized structure, there is no concern of the battery jumping even if it is subject to vertical seismic motion.

### 5. Shorter Installation Time

The unitized structure has reduced the time needed to install the battery.

## Applications

Communication devices, instrumentation devices, disaster and crime prevention systems, power plants and substations, CVCF, emergency lighting systems, and more

## Construction/Specifications

### 1. Cells

- Plates : Highly corrosion-resistant Pb-Ca-Sn alloy plate grid
- Container : Excellent sealing with highly heat- and acid-resistant PP resin thermally bonded to the cover
- Terminals : Shorter installation time with a nut-free structure in which the nuts are embedded in the poles

| Models     | Nominal voltage (V) | Capacity (Ah) |             | Dimensions (mm) |       |       | Mass (approx.kg) |
|------------|---------------------|---------------|-------------|-----------------|-------|-------|------------------|
|            |                     | 1-hour rate   | 1-hour rate | Height          | Width | Depth |                  |
| FMU-S-500  | 2                   | 500           | 325         | 167             | 160   | 399.5 | 29               |
| FMU-S-500  | 2                   | 600           | 390         | 167             | 160   | 459.5 | 35               |
| FMU-S-300  | 2                   | 800           | 520         | 316             | 160   | 399.5 | 47               |
| FMU-S-1000 | 2                   | 1000          | 650         | 316             | 160   | 399.5 | 57               |

### 2. Unit Battery

Battery units are an iron box which houses the required number of cells, which are then stacked to form an assembled battery.

| Models        | Nominal voltage (V) | Capacity (Ah) |             | Dimensions (mm) |       |       | Mass (approx.kg) |
|---------------|---------------------|---------------|-------------|-----------------|-------|-------|------------------|
|               |                     | 1-hour rate   | 1-hour rate | Height          | Width | Depth |                  |
| FMU-S-500-8   | 8                   | 500           | 325         | 201             | 746   | 444   | 135              |
| FMU-S-600-8   | 8                   | 600           | 390         | 201             | 746   | 504   | 165              |
| FMU-S-800-8   | 8                   | 800           | 520         | 349             | 746   | 444   | 220              |
| FMU-S-800-12  | 12                  | 800           | 520         | 349             | 1067  | 444   | 320              |
| FMU-S-1000-8  | 8                   | 1000          | 650         | 349             | 746   | 444   | 260              |
| FMU-S-1000-12 | 12                  | 1000          | 650         | 349             | 1067  | 444   | 380              |
| FMU-S-1500-4  | 4                   | 1500          | 975         | 201             | 1067  | 444   | 200              |
| FMU-S-2000-6  | 6                   | 2000          | 1300        | 349             | 1067  | 444   | 380              |
| FMU-S-3000-4  | 4                   | 3000          | 1950        | 349             | 1067  | 444   | 390              |

## Assembly Battery


### FMU-S Series

| Models            | Assembled battery voltage (V) | Dimensions (mm) |       |       | Installation floor area (m <sup>2</sup> ) | Assembled battery mass (approx.kg) | Floor load (t/m <sup>2</sup> ) |
|-------------------|-------------------------------|-----------------|-------|-------|---|------------------------------------|--------------------------------|
|                   |                               | Total height    | Width | Depth |   |                                    |                                |
| FMU-S-500-8-12S   | 24                            | 703             | 746   | 444   | 0.31                                      | 445                                | 1.34                           |
| FMU-S-600-8-12S   | 24                            | 703             | 746   | 504   | 0.376                                     | 535                                | 1.42                           |
| FMU-S-800-8-12S   | 24                            | 1147            | 746   | 444   | 0.331                                     | 710                                | 2.15                           |
| FMU-S-1000-8-12S  | 24                            | 1147            | 746   | 444   | 0.331                                     | 830                                | 2.51                           |
| FMU-S-1500-4-12S  | 24                            | 1306            | 1067  | 444   | 0.474                                     | 1255                               | 2.65                           |
| FMU-S-2000-6-12S  | 24                            | 1496            | 1067  | 444   | 0.474                                     | 1595                               | 3.36                           |
| FMU-S-3000-4-12S  | 24                            | 1147            | 2297  | 444   | 1.020                                     | 2430                               | 2.38                           |
| FMU-S-500-8-24S   | 48                            | 1306            | 746   | 444   | 0.331                                     | 855                                | 2.58                           |
| FMU-S-600-8-24S   | 48                            | 1306            | 746   | 504   | 0.376                                     | 1035                               | 2.75                           |
| FMU-S-800-12-24S  | 48                            | 1496            | 1067  | 444   | 0.474                                     | 1350                               | 2.85                           |
| FMU-S-1000-12-24S | 48                            | 1496            | 1067  | 444   | 0.474                                     | 1590                               | 3.35                           |
| FMU-S-1500-4-24S  | 48                            | 1306            | 2297  | 444   | 1.020                                     | 2515                               | 2.47                           |
| FMU-S-2000-6-24S  | 48                            | 1496            | 2297  | 444   | 1.020                                     | 3195                               | 3.13                           |
| FMU-S-3000-4-24S  | 48                            | 1496            | 3527  | 444   | 1.566                                     | 4790                               | 3.06                           |


- Notes) 1. For the dimensions in this table, 12S indicates a 3-, 4-, and 6-stage stack, and 24S indicates a 4- and 6-stage stack.  
 2. The total height includes the height of the channel base.  
 3. The height does not include the height of the terminals.  
 4. For other arrangements, capacities, and cubicle dimensions, please contact us.  
 5. The dimensions in this table are the reference values for assembled batteries with standard components.

## Characteristics

### Discharge Current/Capacity Characteristics

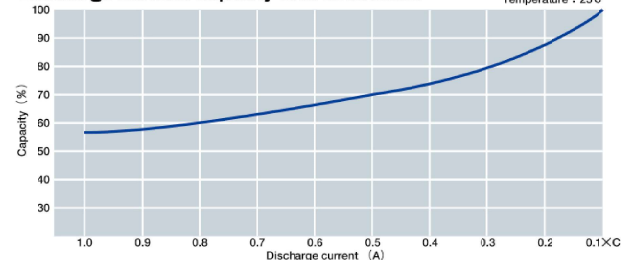


### Temperature/Lifespan Characteristics




\* These values are estimated based on accelerated life testing results and are not guaranteed values.

### Temperature/Capacity Characteristics

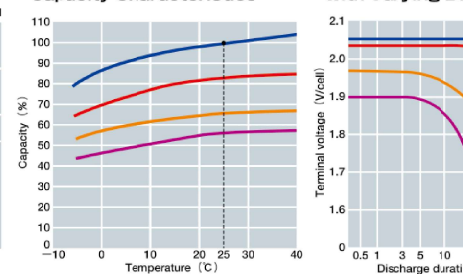

\*\* "C" indicates the value of the rated capacity at a 10-hour rate.

### Discharge Characteristics with Varying Discharge Rates



## Comparison between the FMU-S Series and the MSE Series

| Mode   |  | FMU-S Series  | MSE Series   |
|--|--|---|--|
| Item   | Name   | Horizontal unitized multi-stage valve-regulated stationary lead-acid battery  | Valve-regulated stationary lead-acid battery   |
| Capacity range (rated capacity at 10-hour rate)  |  | Cell (2V) : 500, 600, 800, 1,000 Ah<br>Unit battery : 500 to 3,000 Ah   | 2V : 150~3000Ah<br>6V : 100Ah<br>12V : 50Ah  |
| Volumetric capacity (10 hr)<br>Mass efficiency (10 hr)   |  | 99Wh/L (FMU-S-1000)<br>35Wh/kg (FMU-S-1000)   | 73.5Wh/L (MSE-500)<br>27.8Wh/kg (MSE-500)  |
| Construction   | Plates   | Highly corrosion-resistant Pb-Ca alloy grids with excellent current collecting properties                           | Paste type. A Pb-Ca-alloy grid is filled with active material.                                       |
|  | Container/cover<br>Terminals   | PP resin<br>Lead-alloy terminals with embedded nuts   | ABS resin<br>Lead-alloy terminals  |
| Characteristics  | Relationship between discharge rate and capacity (Standard characteristics at 25°C)<br>C: Rated capacity                                 | (Rated capacity at 10-hour rate)<br>0.10C (A) : 100%<br>0.24C (A) : 83%<br>0.65C (A) : 65%<br>1.00C (A) : 57%       |  |
|  | Relationship between temperature and capacity (0.1 C discharge)  | 25°C : 100%<br>5°C : 92%<br>-5°C : 76%  |  |
| Maintenance inspection   | Self-discharge rate  | 0.1% or less per day (25°C)   |  |
|  | Expected life (25°C)※  | 13 to 15 years (discharge cycles: several times per year) / 7 to 9 years (discharge cycles: several times per year) |  |
|  | Float voltage  | 2.23 V per cell   |  |
|  | Equalizing charge frequency<br>Water refilling frequency<br>Specific gravity measurement<br>Electrolyte level check<br>Parts replacement | Not required  |  |
| Installation   | Maintainability  | Extremely excellent maintainability with all the battery terminals in an easy-to-reach location                     | Usually vertically installed. Same maintainability equivalent to that of the flooded type.           |
|  | Installation direction   | Usually horizontal  | Vertical (may be installed horizontally)   |
| * Comparison at 500 Ah-48 V<br>Assembly battery dimensions (example) (Width X Depth X Height, mm)<br>Installation floor area (m <sup>2</sup> ) |  | β-stage 1-row unit  746 X 444 X 1,306<br>0.33   | [2-stage 2-row rack] 1,125 X 714 X 1,246<br>0.80   |
| Installation method  |  | Units are stacked and then connected to one another. (Nut-free method)<br>* Shorter installation time               | The rack is assembled and batteries are then placed on it. The batteries are connected individually. |

※Expected life is not a guaranteed values.